

61 SERIES

Multi Stack Filter Housing





The **61 Series** multi cartridge housing is available with 3, 5, 7, 10, 12, 15, 18, 19 and 22 element stacks up to 40" long. The top opening style is equipped with a Cast Vee* clamp as standard for pressures up to 10 bar g.

These housings are widely used where low capital cost is of prime importance. Being floor mounted and therefore free standing, these housings will suit most pre-filtration applications. Bolted closures are an option available for all models.

The **61 Series** will accept either standard Double Open End or Single Open End cartridges. This includes the full range of Amazon and industry standard cartridges ranging from 0.1 to 500µm with nominal lengths of 10, 20, 30 and 40".

Accessories available include pressure gauge and vent valve kits, drain valves and bolt down plates. A new differential pressure gauge is also available to provide clear process feedback and aid in filtration optimisation.

* Rathmann type clamp standard on 19 and 22 stack vessels

Accessories	
Pressure Gauge and Vent Valve Kit	
Pressure Gauge and Auto Vent Valve Kit	
Ball Valve and Nipple	
Differential Pressure Gauge Kit	

Note: 7, 12, 18 and 22 only accept 66.5mm maximum diameter cartridges.



Features and Benefits

- Differential pressure gauge accessory available to retrofit for process feedback
- Universal cup allows the use of plug in (Code 3 and Code 8) or DOE cartridge styles in the same housing
- Integral vent, clean and dirty drain sockets aid efficient filter changeout
- Vee clamp closure uses unique 'W' seal for reliable leak free operation (not available on 6119/22)
- Internally and externally electropolished to aid cleaning and hygiene
- Cast compression nut with integral PTFE seal for easy hand tight cartridge installation
- Product is DWI approved (installation into the public water supply)
- Full customised housing service available to ensure optimised installation and operation in your process

Product Range

Amazon Filters design and manufacture an extensive range of liquid filtration systems, providing one of the widest selections of filtration vessels, depth filters and pleated cartridges available today, ensuring excellent process and filter compatibility. As one of Europe's leading manufacturers of filtration systems, Amazon Filters is able to offer a solution to meet all filtration requirements. Amazons' filters are manufactured in clean room conditions and all products come with detailed Product Validation Guides and Technical Support documentation.



AMAZON

61 Series Technical Data

Maximum Operating Condition

	6103	6105/7	6110/12	6115/18	6119/22
Liquid: Vee clamp:	10 bar g	10 bar g	10 bar g	7 bar g	-
Bolted closure:	FV / 10 bar g	FV / 10 bar g	FV / 10 bar g	FV / 10 bar g	FV / 6 bar g
Gas: Vee clamp:	7.5 bar g	4.5 bar g	2 bar g	1.5 bar g	-
Bolted closure:	FV / 7.5 bar g	FV / 4.5 bar g	FV / 2 bar g	FV / 1.5 bar g	FV / 1 bar g

* When fitted with differential pressure gauge kit, temperature limited to 80 °C.

Materials of Construction


Body:	316L St.Steel
Closure:	Vee Clamp - 304 St.Steel Screw Clamp - Zinc plated carbon steel (Optional Stainless Steel)
Vessel Finish:	Electropolished

Connections	6103	6105/7	6110/12
Inlet / Outlet:	2" BSPM	3" BSPM	4" BSPM
Vent:	¼" BSPM	¼" BSPM	½" BSP
Drain:	½" BSPM	½" BSPM	1" BSPM

PED Status:	Compliant with 2014/68/EU
Fluid Groups:	Liquids Group 2 Gas Group 2
Marking:	CE

ATEX: Compliant with 2014/34/EU, level CE Ex II 2 GD c X

Technical drawings for each individual housing showing dimensions, volume, weights, maximum temperatures and design pressures available on request.

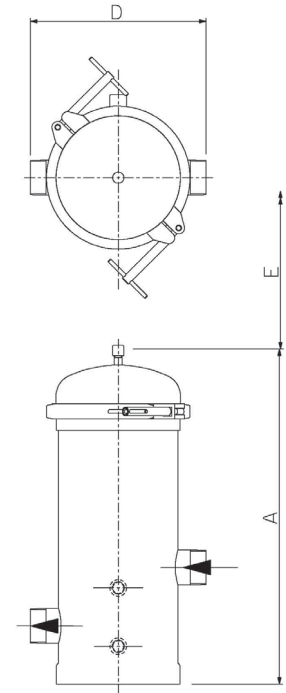

AMAZON FILTERS LTD.

Albany Park Estate, Camberley, Surrey, GU16 7PG, ENGLAND

Tel: +44 (0) 1276 670 600 Email: sales@amazonfilters.co.uk Web: www.amazonfilters.com

SupaPore is a trademark of Amazon Filters Ltd.

AMAZON FILTERS LTD. reserve the right to change specification without prior notice, as part of their continuous product development programme.