

# 72 SERIES

## Hygienic Single Filter Housing



The **72 Series** Hygienic single cartridge housing is available for elements up to 30" long. The 'T' style configuration is ideally suited to small pilot scale or laboratory based processes for pressures up to 10 bar g.

Base mounted, this free standing conventionally styled housing will suit processes where there is a need to allow easy access to all internal areas. This helps ensure the general cleanliness of the process system in which the filter is to operate.

Having no loose internal components ensures easy, fast sanitisations and clean down procedures.

The **72 Series** housing will accept the full range of Amazon Single Open End industry standard cartridges ranging from 0.03 to 40µm with nominal lengths of 10, 20 and 30".

### Product Features

- 'T' style construction with a high specification hygienic finish, electropolished inside and out
- Quick release Vee clamp closure for ease of access
- No loose internals for trouble free operation
- 6 different vent options
- Staubli connections available
- PED and ATEX compliant
- CE Marked



## Features and Benefits

- Standard single open end cartridge fitting, using Bayonet lock code 7 for forward and reverse flow
- 316L construction for maximum corrosion resistance
- Every housing is etched with a serial number for full traceability
- Wide range of options available for the connection size and style, cartridge lengths and materials of construction

## Product Range

Amazon Filters design and manufacture an extensive range of liquid filtration systems, providing one of the widest selections of filtration vessels, depth filters and pleated cartridges available today, ensuring excellent process and filter compatibility. As one of Europe's leading manufacturers of filtration systems, Amazon Filters is able to offer a solution to meet all filtration requirements. Amazons' filters are manufactured in clean room conditions and all products come with detailed Product Validation Guides and Technical Support documentation.



# 72 Series Technical Data

## Maximum Operating Conditions

Pressure Range: Liquid: FV / 10 bar g  
 Gas Group 1: 10" & 20" - FV / 10 bar g  
 30" - FV / 7 bar g  
 Gas Group 2: 10", 20" & 30" - FV / 10 bar g  
 Temperature Range: -10°C / 150°C

## Materials of Construction

Body and Closure: 316L St. Steel  
 Clamp: 304 St. Steel

## Finish

Vessel: 0.8µm Ra mechanically polished inside and out + final electropolish


## Connections

Inlet/Outlet: 1" Tri Clamp

Model	Dimensions					Volume (Litres)	Dry Weight
	A	B	C	D	E		
720117VF10L1PS	505	93	-	195	350	2.6	4.6
720127VF10L1PS	760	93	-	195	600	4.6	6.4
720137VF10L1PS	1015	93	-	195	600	6.6	7.36

PED Status: Compliant 97/23/EC  
 Gas Group 1 + 2  
 Liquids Group 1 + 2  
 Marking: CE  
 Exceptions: Group 1 liquids - Explosive  
 ATEX: Compliant 94/9/EC, level CE Ex II 2 GD c X

Technical drawings for each individual housing showing dimensions, volume, weights, maximum temperatures and design pressures available on request.

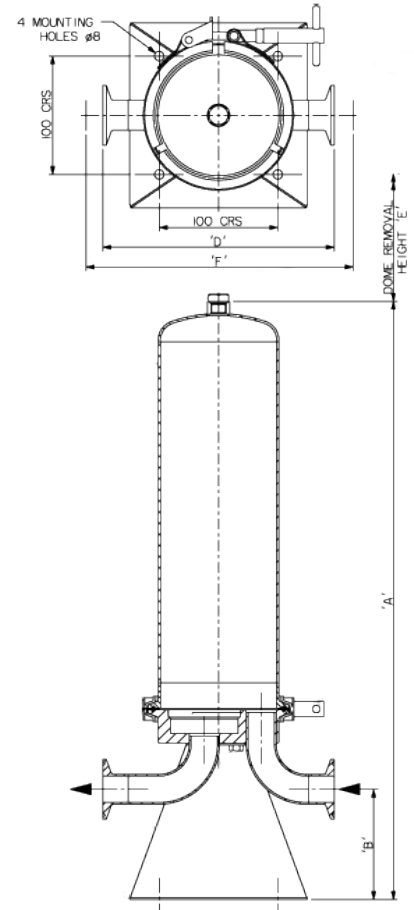

# Ordering Guide

7201	1	7	V	F	10	L	1	P	S
No of Stacks	Cartridge Length	Cartridge End Cap Style	Closure Style	Vent Options	Connection	Connection Type	Materials	Finish	Seal
7201 - 1	0 - Single 5" 1 - Single 10" 2 - Double 20" 3 - Triple 30"	7 - Code 7	V - Pressed Vee Clamp	F - ¼" BSPF vent G - ¼" Hygienic vent H - 1½" TC vent only, No Clamp/blank J - 1½" TC with ¼" Hygienic vent, No Clamp / blank R - ¼" Hygienic vent valve assembly with PTFE seal and Staubli RBE.03.6025 S - 1½" T / C with ¼" Hygienic vent valve assembly with PTFE seal and Staubli RBE.03.6025, No Clamp/blank	10 - 1"	L - Tri Clamp	1 - 316 st.st (L Grade)	P - 0.8µm Ra internal polish + Electropolish	S - Silicone T - PTFE Envelope V - Viton

Example: 720117VF10L1PS = 72 Series, 1 x 10" Code 7 cartridge, pressed vee clamp closure, ¼" BSPF vent, 1" Tri Clamp connections. St. Steel construction with 0.8Ra Internal polish + electropolish.

# AMAZON FILTERS LTD.

ALBANY PARK ESTATE, FRIMLEY ROAD  
 CAMBERLEY, SURREY, GU16 7PG  
 ENGLAND

Tel. +44 (0) 1276 670600  
 Fax. +44 (0) 1276 670101  
 Email. sales@amazonfilters.co.uk  
 Web. www.amazonfilters.com

Distributed by: