

VACUUM COMPONENTS



HIS stocks all standard size vacuum components and tubing at **competitive pricing**. Prior to shipment, every part is tested to the customer's standards, inspected following ISO 9001:2015 specifications, and cleaned for immediate use.

FLANGES & FITTINGS

- KF/NW
- CF
- ISO
- Sanitary




WELD FITTINGS

- Elbows
- Reducers
- Tees
- Crosses



TUBING

- ASTM A249/A269
- ASTM A270
- CFOS Non-Electropolished
- 1/8" to 8" OD

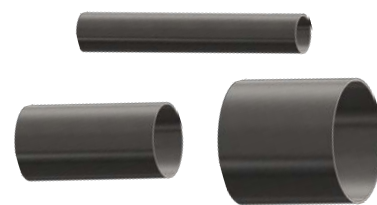

CUSTOM FABRICATION

Work with our engineering team to create custom solutions with the material, flange, and size that your system requires.

SPOOLS

MATERIALS

- 304L stainless steel
- 316/316L stainless steel

SIZING

- 1/2" - 4" Tube O.D.
- Lengths up to 20'

ADAPTIVE FITTING

MATERIALS

- 304 stainless steel
- 316/316L stainless steel
- Aluminum

ADAPTER ENDS

- KF, ISO, CF flange
- Compression
- Sanitary Flange
- Threaded Connection

SIZING

- 1/2" - 6"

CORROSION-RESISTANT SEALS



VITON O-RING

Resistant to high temperatures up to 395°F (200°C), petroleum products, solvents, and a wide range of chemicals.

KALREZ O-RING

Best for high temperature sealing up to 527°F (275°C) and extreme chemical compatibility.

GREENE TWEED

Broad chemical resistance in temperatures ranging from -40°F (-40°C) to 621°F (327°C).

BUNA-N O-RING

Best for oil resistance and temperatures up to 212°F (100°C).

*Other materials available upon request.

