

Cleanness by Purpose

Diaphragm Valve

*Compact Designed
Diaphragm Valve (2MPa-300psi)*

DVE series



IHARA SCIENCE CORPORATION

DVE series Metal diaphragm seal valve (2MPa)

【Features】

DVE series are metal diaphragm valves that are lightweight, compact and cost effective developed with the aim of meeting ultra-high purity standards. Our valve offers exceptional cleanliness and excellent flows for gas distribution systems. Also superior containment and delivery for the most critical gas applications. Manual and automatic operations available; pneumatic Norm-Open, Norm-Closed, Double-Acting & Lock Out Tag Out "bump proof" handle

- Mounted Ni-Co alloy diaphragm which achieves high air-tightness and high durability and actuation longevity
- Equipped with open/close indicator allowing visual check of the valve position. LOTO integral safety handle available
- Oil-free treatment by precision cleaning for all wetted parts & detailed electropolishing procedure for outstanding finish
- Assembled, tested and packaged in ISO5 (class 100) cleanroom, double-bagged with UHP Nitrogen purge

Specifications

Nominal size	1/4"	3/8" & 1/2"	3/4"	Nominal size	1/4"	3/8" & 1/2"	3/4"
Design pressure	Vac. ~2MPa(300psi)			Weight※2	(Manual valve)	(Manual valve)	(Manual valve)
Design temp ※1	-10~+80℃ (14~ 176 ℉)				225g	440g	700g
Cv value ※2	0.3	0.75	1.2		(Air Operated valve)	(Air Operated valve)	(Air Operated valve)
Connecting ※3				Innner volume※4	550g	850g	1250g
					1.3cc	7.3cc	18cc
					(External)		(External)
				He leak test	$1 \times 10^{-11} \text{ Pa} \cdot \text{m}^3/\text{s}$		$1 \times 10^{-10} \text{ Pa} \cdot \text{m}^3/\text{s}$
					(Seat)		(Seat)
					$3 \times 10^{-10} \text{ Pa} \cdot \text{m}^3/\text{s}$		$1 \times 10^{-9} \text{ Pa} \cdot \text{m}^3/\text{s}$

(※1) Contact us for other temperature range

(※2) For VTF (male) connection, differs depending on connection type/size.

(※3) Other types of connections are available.


(※4) For VTF (male) connection, and at valve full-open position

(※5) PVDF, Polyimide, PEEK and other seats available

(※6) Multiple porting options available as "3DVE" = 3 port, "4DVE" = 4 port

Materials of Construction

	Parts Name	Material
①	Body	316L SS (forged)
②	Disk Seat (Seal)	PCTFE
③	Diaphragm	Co-Ni alloy
④	Diaphragm Retainer	304 SS
⑤	Bonnet	304 SS
⑥	Handle	Aluminum Alloy
⑦	Bonnet	304 SS
⑧	Actuator	-

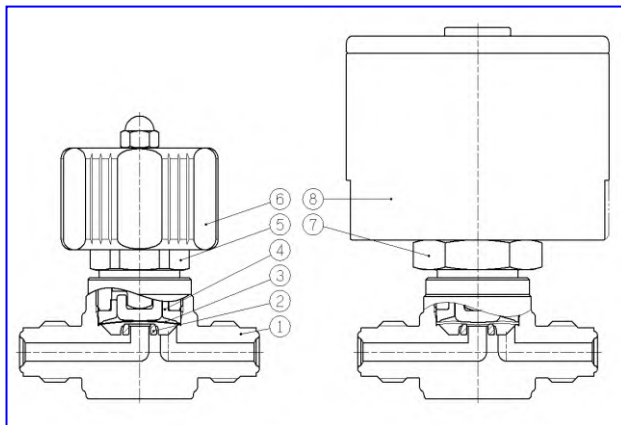


Model Number Notation

DVE - ① - ②③ - ④ - ⑤ - ⑥ - ⑦ - 2MPA

Ex.) DVE - 4VM - NC - EP - OPP - GD4N - 2MPA [1/4" VTF male connection, Pneumatic Normal close, Electropolished, Outlet PP, 1/4" CAPPED]

①		②		③		④		⑥		⑦	
Mark	Type	Mark	Size	Mark	Conn. Fitting	Mark	Operation	Mark	Purge Port	Mark	Purge Port Size
(blank)	straight	4	1/4"	VM	VTF (Male)	(Blank)	Manual	(blank)	None	(blank)	No Purge Port
A	Angle	6	3/8"	VF	VTF (Female)	NC	Normal close	IOPP	Inlet & Outlet	GD4	VTF Gland 1/4"
		8	1/2"	D	BI-Lok	NO	Normal open	OPP	Outlet	GD4N	VTF Gland 1/4", CAP
		12	3/4"	TW	Tube Weld	DA	Double acting	IPP	Inlet		
						LOH	Lock-out tag-out safety handle				
						⑤					
						Mark	ID surface				
						EP	(Ra 5μin)				
						BA	(Ra 10μin)				

Dimensions (Manual)

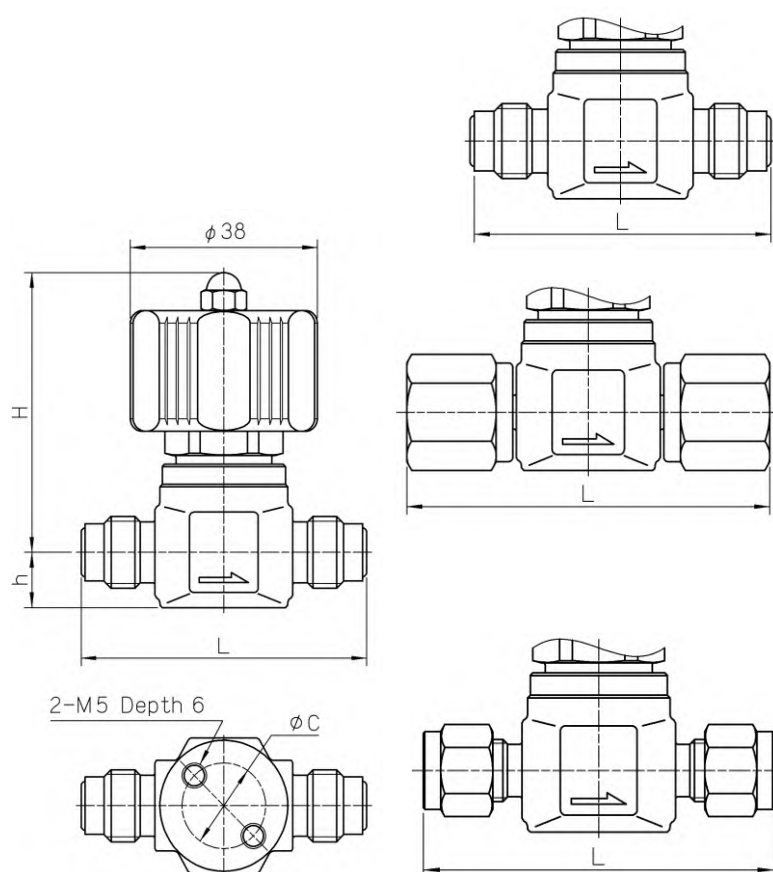

Bottom mounting dimensions are common in all connections


VTF -Metal Gasket Seal (Male)						(mm)
Model	Size	L	H	h	C	
DVE-4VM	1/4"	58	55.5	11	17	
DVE-8VM	1/2"	76	59	16	28	
DVE-12VM	3/4"	82	70.6	20	32	

VTF -Metal Gasket Seal (Female)						(mm)
Model	Size	L	H	h	C	
DVE-4VF	1/4"	70.6	55.5	11	17	
DVE-8VF	1/2"	90	59	16	28	
DVE-12VF	3/4"	120	70.6	20	32	


BI-Lok (Double Ferrule)						(mm)
Model	Size	L	H	h	C	
DVE-4D	1/4"	64	55.5	11	17	
DVE-6D	3/8"	77	59	16	28	
DVE-8D	1/2"	82.6	59	16	28	
DVE-12D	3/4"	92.6	70.6	20	32	

Tube Welded						(mm)
Model	Size	L	H	h	C	
DVE-4TW	1/4"	100	55.5	11	17	
DVE-6TW	3/8"	110	59	16	28	
DVE-8TW	1/2"	110	59	16	28	
DVE-12TW	3/4"	150	70.6	20	32	


Dimensions (Pneumatic)

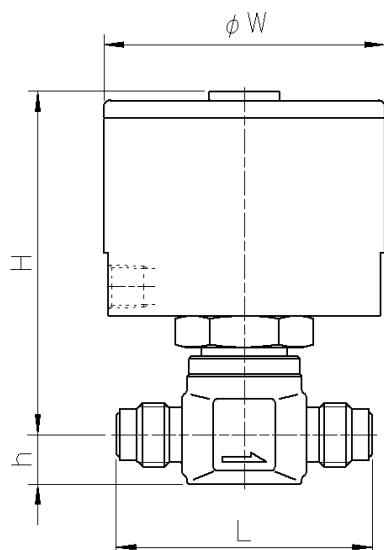


VTF -Metal Gasket Seal (Male)							(mm)
Model	Size	L	H	h	W	C	
DVE-4VM-NC	1/4"	58	76.5	11	63.5	17	
DVE-8VM-NC	1/2"	76	99.5	16	59	28	
DVE-12VM-NC	3/4"	82	111	20	59	32	

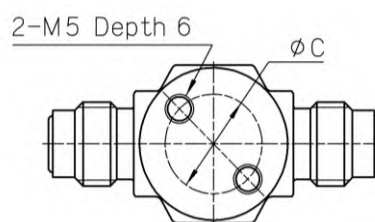

Dimensions (Pneumatic)

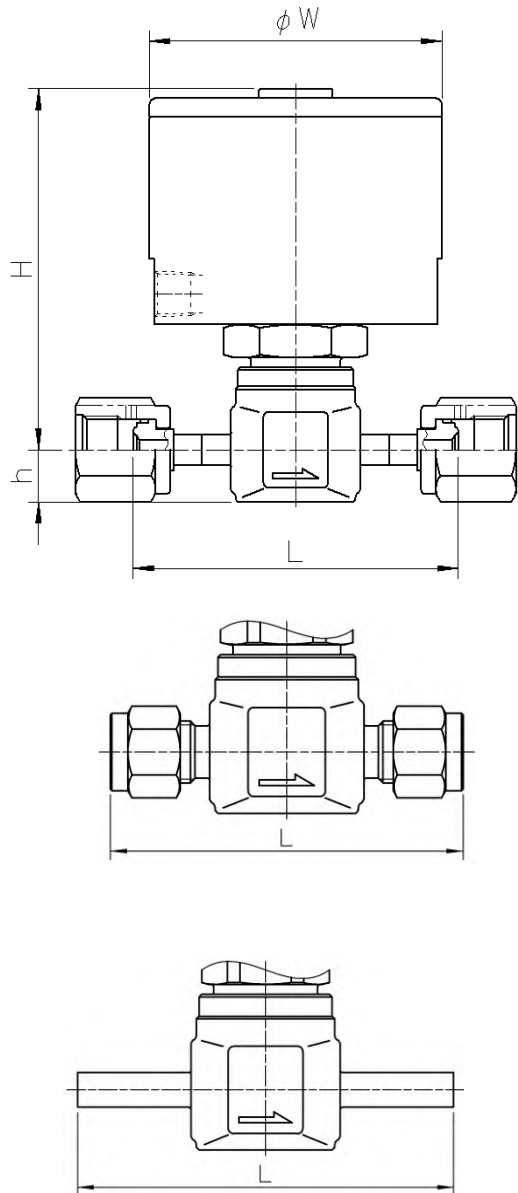

VTF –Metal Gasket Seal (Female)							(mm)
Model	Size	L	H	h	W	C	
DVE-4VF-NC/NO	1/4"	70.6	76.5	11	63.5	17	
DVE-8VF-NC/NO	1/2"	90	99.5	16	59	28	
DVE-12VF-NC/NO	3/4"	120	111	20	59	32	

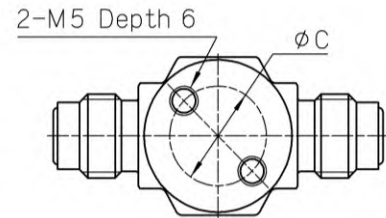

Bottom mounting dimensions are common in all connections

BI-Lok (Double Ferrule)							(mm)
Model	Size	L	H	h	W	C	
DVE-4D-NC/NO	1/4"	64	76.5	11	63.5	17	
DVE-6D-NC/NO	3/8"	77	99.5	16	59	28	
DVE-8D-NC/NO	1/2"	82.6	99.5	16	59	28	
DVE-12D-NC/NO	3/4"	92.6	111	20	59	32	

Tube Welded							(mm)
Model	Size	L	H	h	W	C	
DVE-4TW-NC/NO	1/4"	100	76.5	11	63.5	17	
DVE-TWD-NC/NO	3/8"	110	99.5	16	59	28	
DVE-8TW-NC/NO	1/2"	110	99.5	16	59	28	
DVE-12TW-NC/NO	3/4"	150	111	20	59	32	

Options



*Outlet Purge Port



*Angle type is available upon request.

Related Products

DVF Compact Diaphragm Valve (1MPa – 150psi)



HFD High Flow Diaphragm Valve



CVY Y-Type Bellows Seal Valve



PYB Pipe-Welded Y-Type Bellows Seal Valve (1MPa~2MPa)



ISO9001, ISO14001 Certified Office

Certified office for high-pressure gas facility testing and manufacturing.

certified office for N valves and N-II fittings

IHARA SCIENCE CORPORATION

◆Head Office

11-3 Takanawa 3-chome Minato-ku, Tokyo 108-0074 Japan
TEL: 03-6721-6981 FAX: 03-6721-6991

◆IHARA SCIENCE TAIWAN Co.,Ltd

B2, 7F, No. 51, Sec. 2, Gongyi Rd., Nantun Dist., Taichung City 408330,
Taiwan (R.O.C.)
TEL: +886-4-2319-1116 FAX: +886-4-2319-1126

◆IHARA KOREA Co.,Ltd

Digital Empire II 103-905, Sinwon-ro 88, Yeongtong-Gu, Suwon-Si
Gyeonggi-Do, 443-734, South Korea
TEL: +82-31-695-6800 FAX: +82-31-695-6808

◆IHARA SCIENCE USA CORPORATION

17971 Sky Park Circle, Suite B, Irvine, California 92614 U.S.A.
TEL: 949-387-3727
FAX: 949-387-3739

◆NANTONG IHARA SCIENCE Co.,Ltd

No.1692-8 Xinghu Road, Economic & Technological Development
Zone, Nantong, Jiangsu 226010 P.R.China TEL: +86-513-89072116
FAX: +86-513-81520182



WARNING

If you don't select and handle fittings, valves and related accessories in an adequate manner, it may damage human beings and applicable systems.
Within the responsibility and authorization of users and piping designers, fittings, valves and related accessories shall be adequately selected, used and maintained based on the applicable conditions and product conformity to the system to be applied. Please read carefully the operation manual and feel free to contact with Ihara if you have any question or request.

WARRANTY CLAUSE

1. Warranty Period

The warranty period of the products is one (1) year from putting into service or one and half (1.5) years after delivery whichever comes earlier.
However, the products specially specified and/or the cases used under deviating from the specification shall be exempted.

2. Scope of Warranty

Any failure and damage under maker's responsibility will be found during the warranty period, the substitutes and/or replacement parts shall be provided free of charge. The warranty shall not be applied to a claim for the

■ URL : <http://www.ihara-sc.co.jp/>

■ Please be advised that the contents of this catalogue may be revised without notice when improvements or modifications are made on the time.