



Cleanness by Purpose

O

Ring

seal

O-Ring Seal Fitting

VTF-O series

《Features》

- ◆ Connect quickly and easily
- ◆ Detachable repeatedly !
- ◆ Reliable seal

《Specifications》

- ◆ Max. work temp.: +200°C *Note 1*
- ◆ Working press.: 14MPa
- ◆ Fluid: Gas

※Note 1: O-Ring material FKM




IHARA SCIENCE CORPORATION

O-Ring Seal Fittings

Indication of Model Number

Ex.):

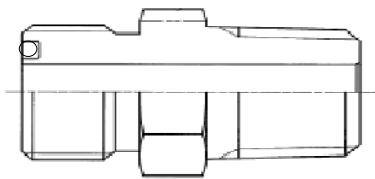

VTF - O ① ② - ③ ④

① Shape
CT: Male Connector
SA: Female Connector
LN: Elbow Nipple
UA: Union
:
:

O-ring Seal Size	
② Indication	Size
4	1/4
8	1/2
12	3/4

Tapered Pipe Thread			
③ Indication	Thread type	④ Indication	Size
R	R: ISO Male	2	1/8
	Rc: ISO Female	4	1/4
	NM: NPT Male	6	3/8
	NF: NPT Female	8	1/2
		12	3/4
		16	1

Various Connections

※Standard products are available

Welding VTF-WOUB	VTF-OSU	Welding VTF-WOCT
Welding VTF-WOGB	VTF-OXA	VTF-SGS



IHARA SCIENCE CORPORATION

ISO9001/ISO14001 Certified

Headquarters

3-11-3 Takanawa, Minato-Ku, Tokyo 108-0074 Japan
TEL: 03-6721-6981 FAX: 03-6721-6991

China : Nantong Ihara Science Co., Ltd.

No.1692-8 Xinghu Rd., Economic & Technical Development Zone,
Nantong, Jiangsu 226010 P.R.China
TEL: 0513-89072116 FAX: 0513-81520182

Korea : Ihara Korea Co., Ltd. Digital Empire II 103-905, Sinwon-ro 88, Yeongtong-Gu, Suwon-Si Gyeonggi-Do, 443-734 South Korea

USA : Ihara Science USA Corp.

17971 Sky Park Circle, Suite B, Irvine, CA 92614 USA
TEL: 949-387-3727 FAX: 949-387-3739

Taiwan : Ihara Science Taiwan Co., Ltd.

B2, 7F, No.51, Sec.2, Gongyi Rd., Nantun Dist, Taichung,
408330 Taiwan (R.O.C)
TEL: 04-2319-1116 FAX: 04-2319-1126
TEL: 031-695-6800, FAX: 031-695-6808

■URL: <http://www.ihara-sc.co.jp/en>

■The contents of this catalog are subject to change without prior notice for product improvement, etc.

CAT No.YKT05E